

New

Tecpacking 2020

Product introduction

Tecpacking

| Contents



01 Machine Display



02 Application



03 Sample Bag



04 Specifications



05 characters



06 Component List



07 Layout Dimensions

Machine Display



Application

Suitable for the
outer bag packing.
One inner
pyramid tea bag
with one envelop
bag

右键点击



Specifications-TP-E100

Item	Data
Dimensions of machine (L*W*H)	L1350 x W875 x H2060 mm
Overall Dimensions includes the conveyor connect with pyramid tea bag machine and output (L*W*H)	L3290x W875 x H2060 mm
Weight	600kg
Power	220V 50HZ 1P Max. 3.5kw
Operating Pressure and Consumption	6 bars, 600l/min (12mm air pipe)
Sealing type	Heatable sealing
Bag type	Three sides sealing
Material	PET/PE, PET/VMPET/PE, BOPP/VMPET/PE and other heatable sealing laminationed packing material. Thickness of material: 60-80micorn
Bag size (W*L)	according to the inner pyramid bag size. For 140mm pyramid bag, the standard outer bag size is 80*90mm
Capacity	90-100 bags/min (according to the capacity of pyramid tea bag packing machine)
Certification	CE



According to Europe standard production, all electrical parts are grounded to prevent electricity danger, electrical cabinet waterproof grade IP54, all parts of the machine are affixed with standard safety production sign



The machine can be stopped by safety relay when the safety circuit is out of order, the machine can not be started again, which can guarantee the safety of the operator and the machine




when the safety door is opening, the machine automatically stop, cylinder pressure relief: Emergency Stop the machine, the horizontal sealing system automatically relieve pressure, to avoid accident.

Component

Name	Brand	Country
Component List	SIEMENS	Germany
Proximity switch	OMRON	Japan
photocell	Panasonic	Japan
Stepper motor	MOONS'	China
Stepper driver	MOONS'	China
Circuit breaker	ABB	Switzerland
Button	ABB	Switzerland
Relay	ABB	Switzerland
Photocoupler	Weidmuller	Germany
Main switch	Schneider	France
Limit switch	OMRON	Japan
Door safety switch	OMRON	Japan
Touch panel	Kinco	China
Solenoid valve	SMC	Japan
Cylinder	SMC	Japan
Power supply	MEAN WELL/ OMRON	Germany/Japan

Layout Dimensions

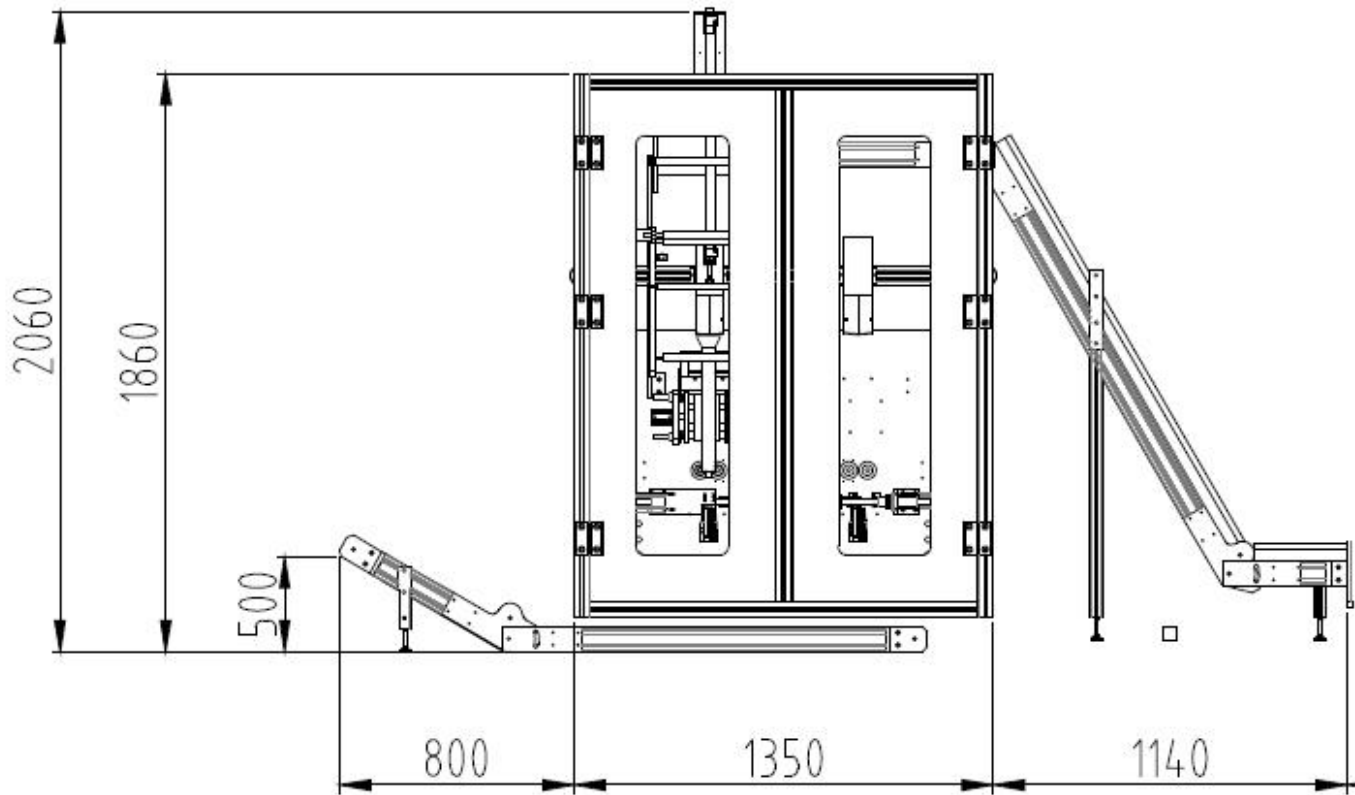


Overall dimension :

L3290x W875 x H2060 mm



Note: The size may change according to the future pan or customer demands.



Layout Dimensions for TP-P100 & TP-E100 Packing line

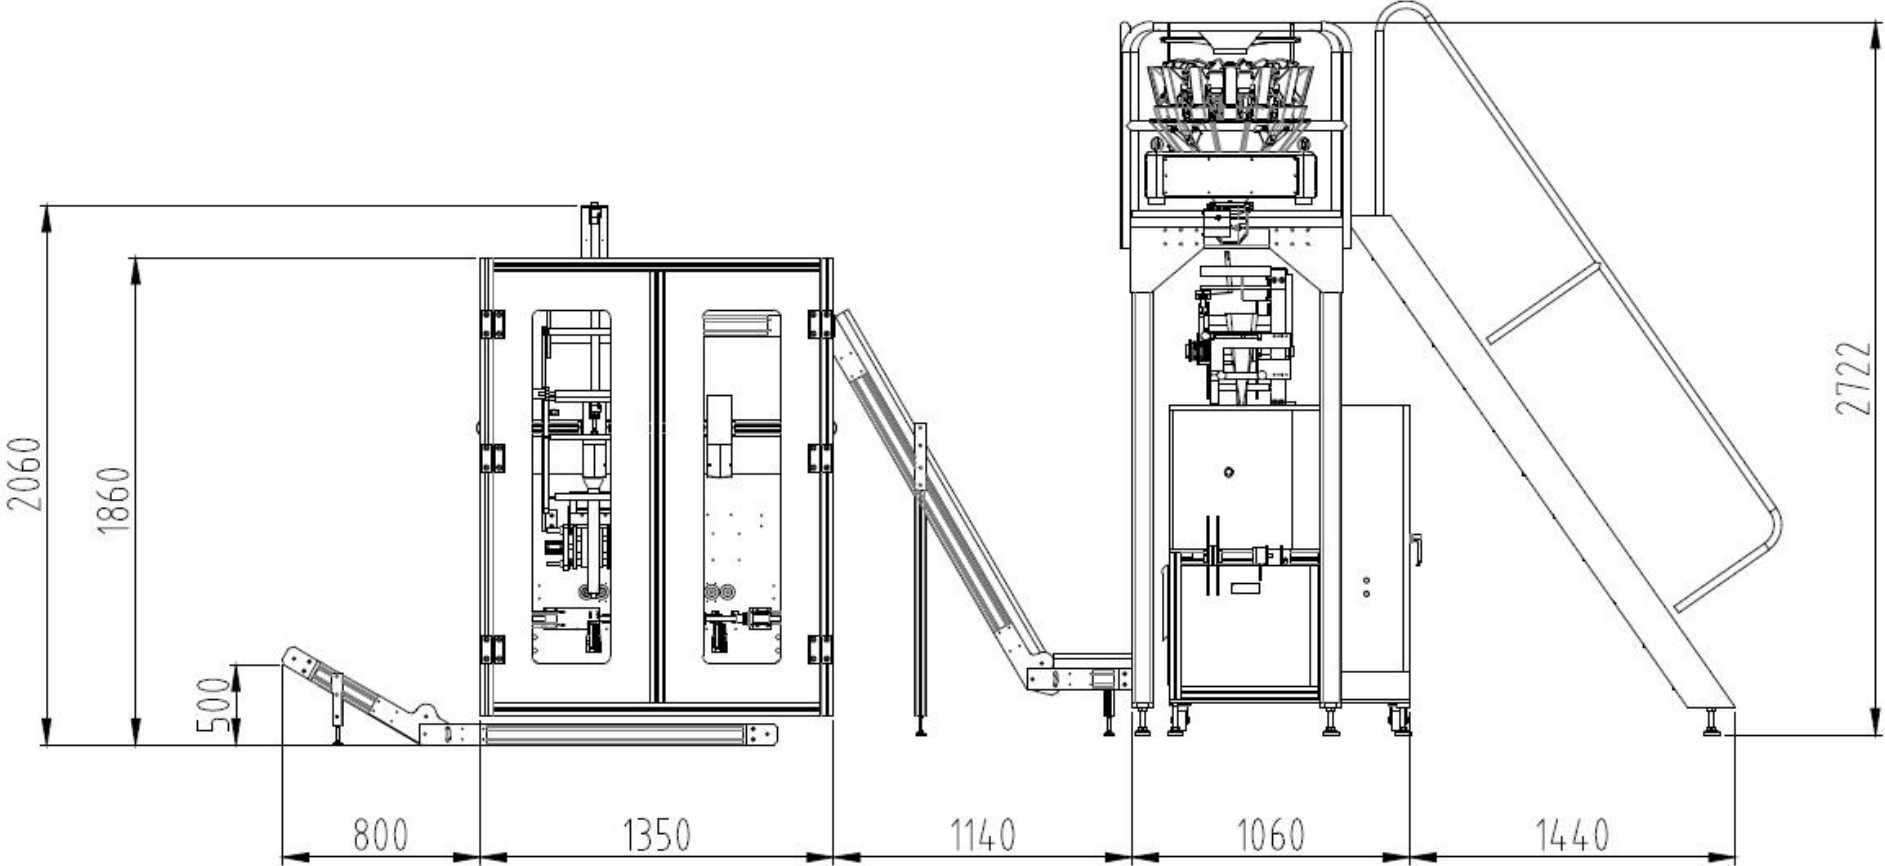

Layout for TP-E100

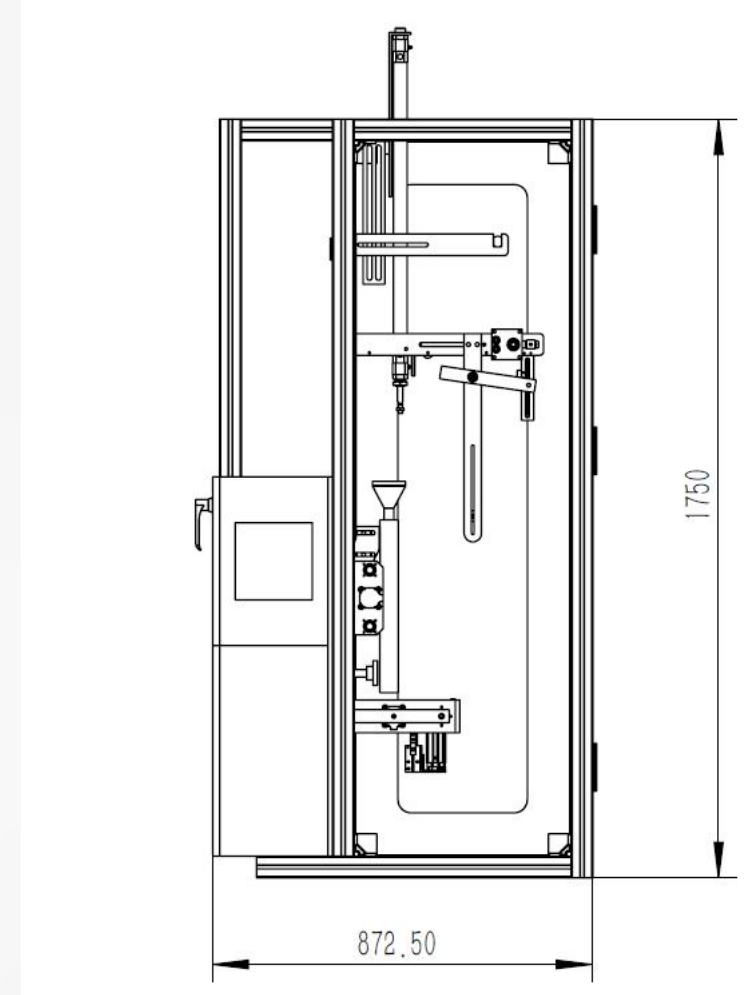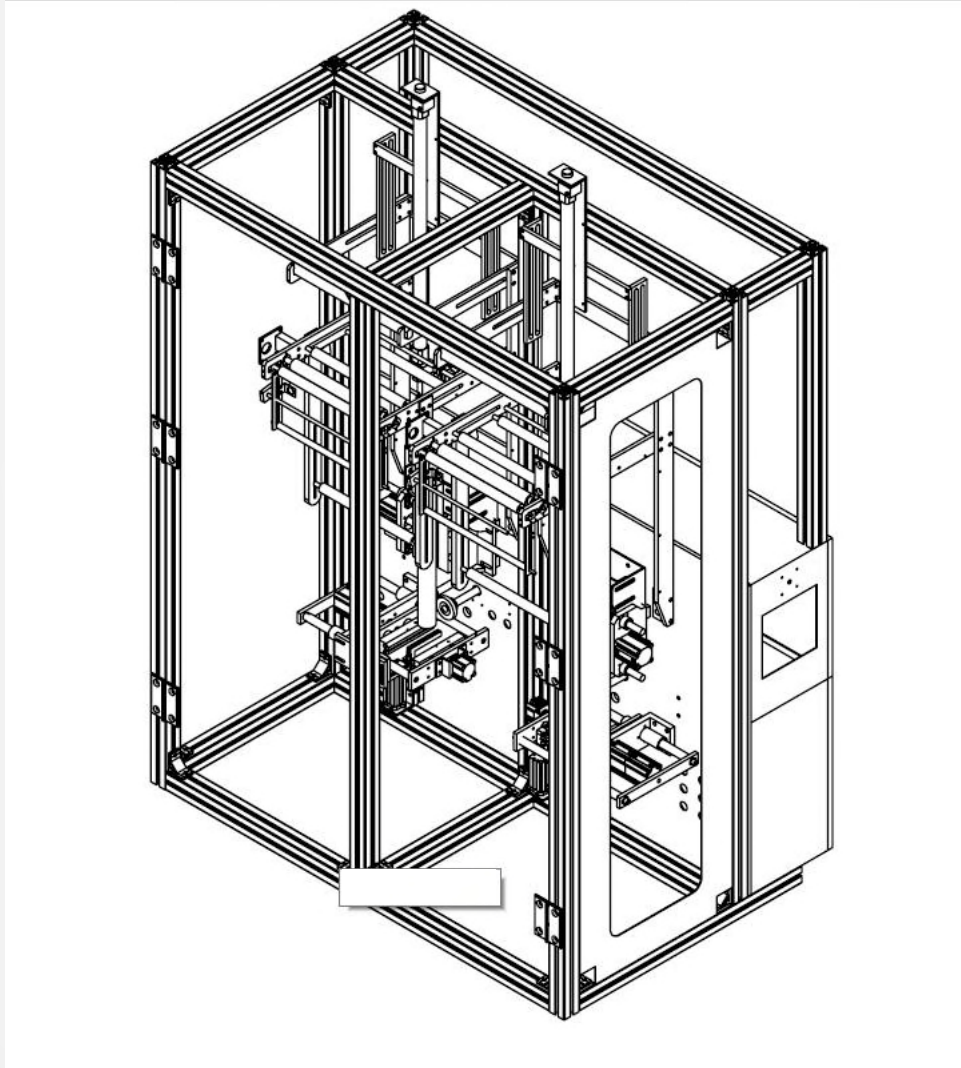

After-Sales Service

1. Warranty : Two years from the date of shipment

2. Remote update (options) .

3. 24 hours online services provide technical support

4. Life-long technical support accessories service

5. One free technical training and Installation service; Customer in charge of air ticket and local accommodation ;

After-sales service lasts for three days .



WhatsApp\Viber\Telegram

+7 910 729 73 63